


PREDATOR GUARD

(U.S. Fish and Wildlife Service)

Cone-shaped, sheet-metal guard for protecting nest structures from predators. At right is layout for cutting 3 predator guards from a 3' x 8' sheet of 26-gauge galvanized metal. When installing the guard, overlap the cut edge to the dotted line. To facilitate cutting (on solid lines only) follow the sequence of numbers. Make circular cuts in counterclockwise direction. To make initial cut on line A-B, make a slot at A with a cold chisel. Use tinsnips and wear leather gloves.

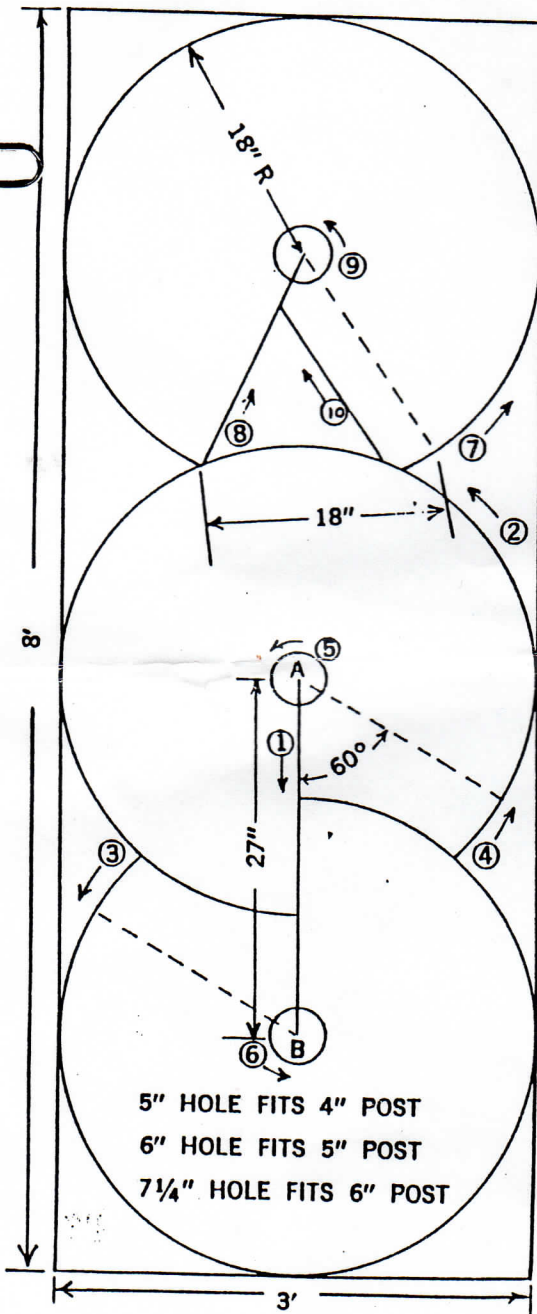

USE 3 WOODEN MOUNTING BLOCKS

DRILL PILOT HOLE FOR NAILING BLOCK TO POST
SIDE VIEW CUT AWAY TO SHOW MOUNTING BLOCK



NAIL GUARD IN PLACE

36" MIN. ABOVE WATER

1/4" ROUND HEAD STOVE BOLTS OR METAL SCREWS

